


Two Stage Water Ring Vacuum Pump Compressor VWS II Series



PPIS **PPI SYSTEMS**

ISO 9001 CERTIFIED

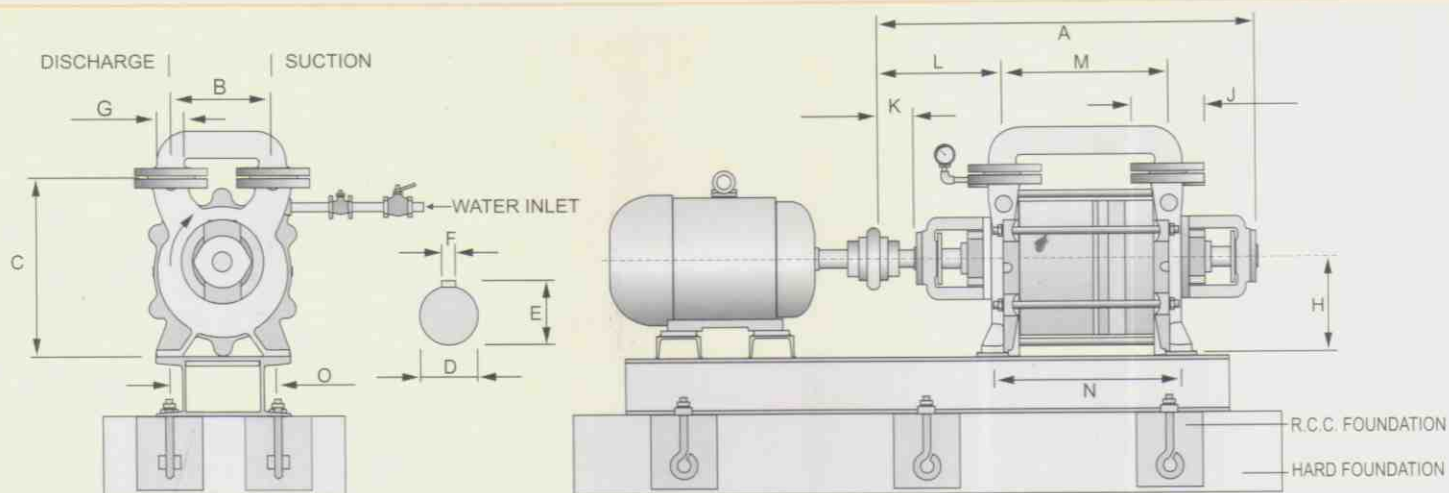

DIMENSIONS

Pump Model	A	B	C	D	E	F	G	H	J	K	L	M	N	O
VWS-75II	685	180	320	28	32	8	40	160	150	48	199	339	399	200
VWS-100II	812	230	402	38	43	10	50	212	165	80	282	334	384	240
VWS-150II	852	230	402	38	43	10	50	212	165	80	282	374	424	240
VWS-200II	912	230	402	38	43	10	50	212	165	80	282	434	484	240

All Dimensions are in mm.

TECHNICAL SPECIFICATION

Pump Model	Recommended Motor (H. P. / R. P. M.)	Operating Speed	Max. Suction Capacity	Max. Vacuum with Close suction mm of Hg.	Sealing Water Required (At 30°C & at Inlet Pressure of 0.5 to 0.8 Kg / cm ²)
VWS-75II	7.5/1440	1440	175 M ³ /Hr.	720	14 L.P.M.
VWS-100II	10/1440	1440	220 M ³ /Hr.	720	20 L.P.M.
VWS-150II	15/1440	1440	305 M ³ /Hr.	720	25 L.P.M.
VWS-200II	20/1440	1440	400 M ³ /Hr.	720	30 L.P.M.

NOTE : PUMP WILL BE SUPPLY WITH SINGLE MECH. SEAL C Vs. BUM 5 FACE COMBINATION & VITON 'O' RINGS. OTHER OPTION IS ALSO AVAILABLE. DIMENSION AND SPECIFICATIONS ARE SUBJECT TO CHANGE.

Wide choice of Material

Type	Material
A	Complete Cast Iron
C	Partial SS-316
S	Complete SS-316

Applications

- ◆ Vacuum Filtration ◆ Vacuum Distillation
- ◆ Moisture Extraction ◆ Vacuum Condensation
- ◆ Evaporation

PPIS PPI SYSTEMS

9-A, Phase 1, G.I.D.C. Estate, Vatwa Ahmedabad - 382445. India

Phone : (079) 5832273/4, 5835698

Fax : (079) 5830578

E-Mail : sales@prashant-ppi.com / info@ppipump.com

Website : www.prashant-ppi.com



RWTIV

ISO 9001 CERTIFIED

BRANCHES :

- NEW DELHI • CHENNAI • INDORE
- MUMBAI • HYDERABAD • KOLKATA